


The Single-Ended Compact Fluorescent Lamp



- High Efficacy – up to 80% energy saving compared with incandescents
- Eight times the life of incandescents – average life up to 8000 hours*
- Excellent colour rendering
- DU G24d base lamp (2-pin lamp) with integral starter and RF suppression capacitor is only suitable for use with conventional control gear
- DUE G24q base lamp (4-pin lamp) doesn't contain integral starter, is suitable for use with High-Frequency electronic control gear. The power can be AC-mains, DC-mains, batteries, solar cell, etc
- DUE base casing is shorter than DU
- Lumen Maintenance – min. 90% at 2000 hours

* tested according to IEC969

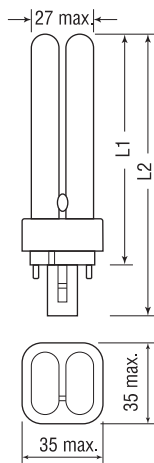

Brightness	
10 W	→ 60 W
13 W	→ 75 W
18 W	→ 100 W
26 W	→ 2x75 W

Long Life	
→ 8 X	

Model	Lamp Wattage	Luminous Flux	Rendering Index	Base	Length L1 max	Length L2 max	Average Life	Standard Pack
	W	L m	R a		m m	m m	h	p c s
DU 10W	10	630	80	G24d-1	92	115	8000	1/25/100
DU 13W	13	880	80	G24d-1	112	135	8000	1/25/100
DU 18W	18	1160	80	G24d-2	130	153	8000	1/25/100
DU 26W	26	1500	80	G24d-3	152	175	8000	1/25/100
DUE 10W	10	580	80	G24q-1	92	108	8000	1/25/100
DUE 13W	13	860	80	G24q-1	112	128	8000	1/25/100
DUE 18W	18	1180	80	G24q-2	130	146	8000	1/25/100
DUE 26W	26	1710	80	G24q-3	152	168	8000	1/25/100

- Colour Temperature - Warmwhite, Coolwhite and Daylight are available
- The conventional control gear or HF electronic control gear used with DU or DUE should be well designed and made according to applicable IEC standards