


LUXMAN® ELECTRONIC CFL LOW VOLTAGE ELT-L

The 3U Compact Fluorescent Lamp with integral electronic control gear for DC/AC LOW VOLTAGE

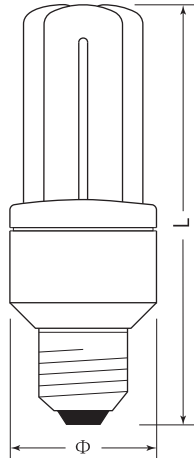

- High Efficacy – up to 80% energy saving compared with incandescents
- Six times the life of incandescents - average life up to 6000 hours
- Excellent colour rendering
- Lumen Maintenance – min. 90% at 2000 hours
- Protection for Reverse Polarity
- Compliance with IEC EMC requirement
- Wide voltage range

Applications:

Garden lighting, Solar lighting, Car lighting, Train lighting, etc



Model	Lamp Wattage W	Supply Voltage V	Luminous Flux L m	Rendering Index Ra	Base	Length L max mm	Diameter Φ mm	Rated Avg. Life h	Standard Pack pcs
ELT-L12 9W	9	12V DC	480	80	ES	108	43	6000	1/10/100
ELT-L12 11W	11	12V DC	600	80	ES	115	43	6000	1/10/100
ELT-L12 15W	15	12V DC	880	80	ES	135	46	6000	1/10/100
ELT-L24 9W	9	24V DC	480	80	ES	108	43	6000	1/10/100
ELT-L24 11W	11	24V DC	600	80	ES	115	43	6000	1/10/100
ELT-L24 15W	15	24V DC	880	80	ES	133	43	6000	1/10/100

- Central point is + polarity

Model	Lamp Wattage W	Supply Voltage V	Luminous Flux L m	Rendering Index Ra	Base	Length L max mm	Diameter Φ mm	Rated Avg. Life h	Standard Pack pcs
ELT-L 9W	9	12V/50Hz	480	80	ES/BC*	108	43	6000	1/10/100
ELT-L 11W	11	12V/50Hz	600	80	ES/BC	115	43	6000	1/10/100
ELT-L 15W	15	12V/50Hz	880	80	ES/BC	135	46	6000	1/10/100

* ES - Edison Screw E27 or E26, BC - Bayonet Cap B22d

- Colour Temperature - Warmwhite, Coolwhite and Daylight are available
- Use indoors, or outdoors in enclosed and ventilated luminaires