

The independent safety Electronic Transformer for 12V halogen lamp







- Dimmable with trailing-edge phase cut dimmer and most leading-edge phase cut dimmer
- Class II protection against electric shock
- Reversible short-circuit, overload protection and thermal protection
- Protected against mains voltage spikes
- Soft start to prolong lamp life by 50%
- Suitable for installation in furniture
- Leads in cable 20cm, 0.75mm², leads out cable 20cm, 0.75mm², 180°C silicon wire with woven glass fabric
- IP20
- Complied with applicable standards for safety, performance and EMC

EMC Emission EN61000-3-2, EN61000-3-3
Immunity EN61547, EN61000-4-2-EN61000-4-6
EN61000-4-11

Safety EN61347-1, EN61347-2-2
Performance EN61047

- RoHS Compliant

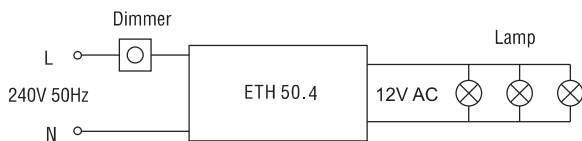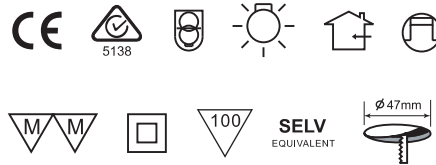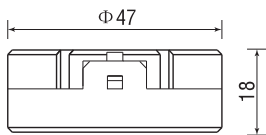

Wiring Diagram

Type	Supply Voltage	Supply Current	Output Voltage	Load Range	Ambient Temperature	Casing Temperature	Certification	Weight	Standard Pack
	V/Hz	A	Vrms		Ta	Tc		g	pcs
ETH 50.4	220-240 / 50-60	0.23	11.6	10-50W	-20°C to 45°C	80°C	CE	65	1/20/100

Option: Input with cable and plug, output with cable and AMP socket

The colour of plastic enclosure: White, Transparent Blue, Transparent Green, Black or whatever upon request

24Vrms output is available upon request