



The Low Voltage, Bin-Pin halogen lamp

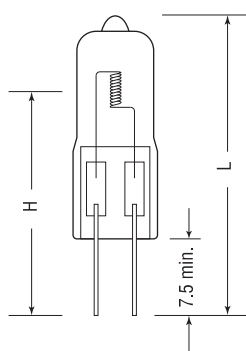

- Low-pressure design complies with the new IEC598 standard
- Long life
- Crisp light and excellent colour rendering
- Colour Temperature approx. 3000K

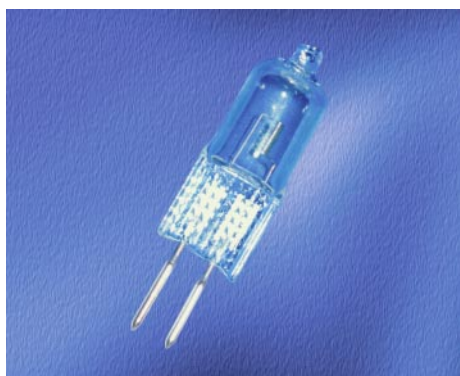

Model	Lamp Wattage W	Lamp Voltage V	Luminous Flux L m	Rated Avg. Life h	Length C max mm	LCL H max mm	Base	Standard Pack pcs
JC 6V 10W	10	6	115	2000	33	24	G4	1/100/1000
JC 6V 20W	20	6	300	2000	33	24	G4	1/100/1000
JC 6V 35W	35	6	600	2000	44	32	GY6.35/G6.35	1/100/1000
JC 12V 5W	5	12	50	2000	33	24	G4	1/100/1000
JC 12V 10W	10	12	120	2000	33	24	G4	1/100/1000
JC 12V 20W	20	12	320	3000	33	24	G4	1/100/1000
JC 12V 35W	35	12	600	3000	44	32	GY6.35/G6.35	1/100/1000
JC 12V 50W	50	12	900	3000	44	32	GY6.35/G6.35	1/100/1000
JC 12V 75W	75	12	1350	2000	44	32	GY6.35/G6.35	1/100/1000
JC 12V 100W	100	12	2200	1000	44	32	GY6.35/G6.35	1/100/1000
JC 24V 20W	20	24	250	2000	33	24	G4	1/100/1000
JC 24V 35W	35	24	540	2000	44	32	GY6.35/G6.35	1/100/1000
JC 24V 50W	50	24	900	2000	44	32	GY6.35/G6.35	1/100/1000
JC 24V 75W	75	24	1210	2000	44	32	GY6.35/G6.35	1/100/1000
JC 24V 100W	100	24	1700	1000	44	32	GY6.35/G6.35	1/100/1000
JC 24V 150W	150	24	3500	200	50	34	GY6.35/G6.35	1/100/1000
JC 24V 250W	250	24	5100	200	50	34	GY6.35/G6.35	1/100/1000

- Options: UV Stop, Frosted glass, Gold-plated pins, Axial filament
- BA9s base is available on request
- Special colour temperature is available on request