


The higher-wattage Single-Ended Compact Fluorescent Lamp



- Much higher efficacious than conventional fluorescent tubes
 - Suitable for use with conventional control gear and starters, or High-Frequency electronic control gear
 - Excellent colour rendering
 - Long Life – average life up to 8,000 hours*
 - Compact and Slim compared with conventional fluorescent tubes, U-shaped and circular lamps
 - Lumen Maintenance – min. 80% at 2000 hours
- * tested according to IEC969

Applications: New short-run luminaires, such as rectangular, square or round ceiling and wall luminaires for offices, foyers, commercial sites, etc

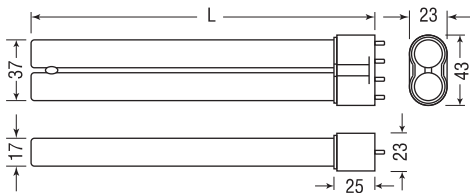

Model	Lamp Wattage W	Luminous Flux L m	Rendering Index R a	Base	Length L max m m	Average Life h	Standard Pack p c s
SHL 18W	18	1100	80	2G11	217	8000	1/50
SHL 24W	24	1650	80	2G11	317	8000	1/50
SHL 36W	36	2600	80	2G11	411	8000	1/50
SHL 40W	40	3150	80	2G11	533	8000	1/50
SHL 55W	55	3980	80	2G11	533	8000	1/50

- Colour Temperature - Warmwhite, Coolwhite and Daylight are available
- The conventional control gear or HF electronic control gear used with SHL should be well designed and made according to applicable IEC standards