



T5 Circular Fluorescent Lamps with 16mm diameter

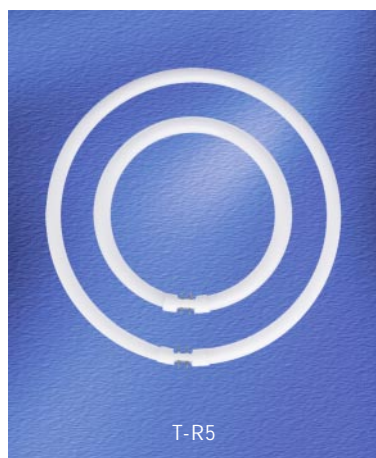

| Model    | Lamp     | Lamp         | Lamp       | Luminous<br>Flux<br><b>L m</b> | Rendering<br>Index<br><b>R a</b> | Base  | Diameter    |            | Average<br>Life<br><b>h</b> | Standard<br>Pack<br><b>pcs</b> |
|----------|----------|--------------|------------|--------------------------------|----------------------------------|-------|-------------|------------|-----------------------------|--------------------------------|
|          | Wattage  | Voltage      | Current    |                                |                                  |       | D3          | D1         |                             |                                |
|          | <b>W</b> | <b>V</b>     | <b>m A</b> |                                |                                  |       | <b>m m</b>  | <b>m m</b> |                             |                                |
| T-R5 22W | 22       | 70 $\pm$ 10  | 300        | 1600*/1500**                   | 82                               | 2GX13 | 225 $\pm$ 5 | 16         | 8000                        | 1/20                           |
| T-R5 40W | 40       | 126 $\pm$ 10 | 320        | 2900/2700                      | 82                               | 2GX13 | 299 $\pm$ 6 | 16         | 8000                        | 1/20                           |
| T-R5 55W | 55       | 101 $\pm$ 10 | 550        | 3800/3400                      | 82                               | 2GX13 | 299 $\pm$ 6 | 16         | 8000                        | 1/20                           |

\* Lumen output for Warmwhite colour

\*\* Lumen output for Daylight colour

- Colour Temperature - Warmwhite, Coolwhite and Daylight are available
- Electronic control gear used with T-R5 should be well designed and made according to applicable IEC standards