


LUXMAN® HALOGEN LINEAR J

The Double-Ended Halogen Lamp for mains voltage



- Supply Voltage – 220-240V/50-60Hz
- Longer life and energy saving compared with incandescents
- Crisp light and excellent colour rendering
- Burning position Horizontal $\pm 15^\circ$
- Universal burning position up to 500W is available
- Fully dimmable
- Colour temperature approx. 2800K

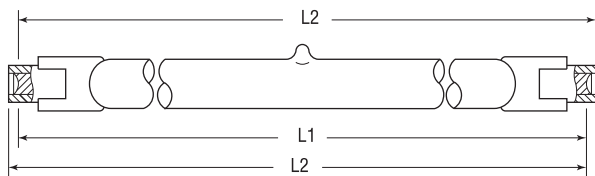

Model	Lamp Wattage W	Luminous Flux L m	Rated Avg. Life h	Contact Gap L1 mm	Length L2 max mm	Base	Standard Pack pcs
J 60W	60W	800	1000	74.9	78.3	R7s	1/50/500
J 100W	100W	1600	1500	74.9	78.3	R7s	1/50/500
J 150W	150W	2400	1800	74.9	78.3	R7s	1/50/500
J 100W	100W	1600	1500	114.2	117.6	R7s	1/50/500
J 150W	150W	2200	2000	114.2	117.6	R7s	1/50/500
J 200W	200W	3200	2000	114.2	117.6	R7s	1/50/500
J 300W	300W	5000	2000	114.2	117.6	R7s	1/50/500
J 500W	500W	9200	2000	114.2	117.6	R7s	1/50/500
J 750W	750W	16000	1500	185.7	189.1	R7s	1/50/500
J 1000W	1000W	20000	1500	185.7	189.1	R7s	1/50/500
J 1500W	1500W	32000	1000	250.7	254.1	R7s	1/50/500
J 2000W	2000W	43000	1000	327.4	330.8	R7s	1/50/500

- Options: UV stop, frosted, shock-resistant Ring-Fixed filament support